

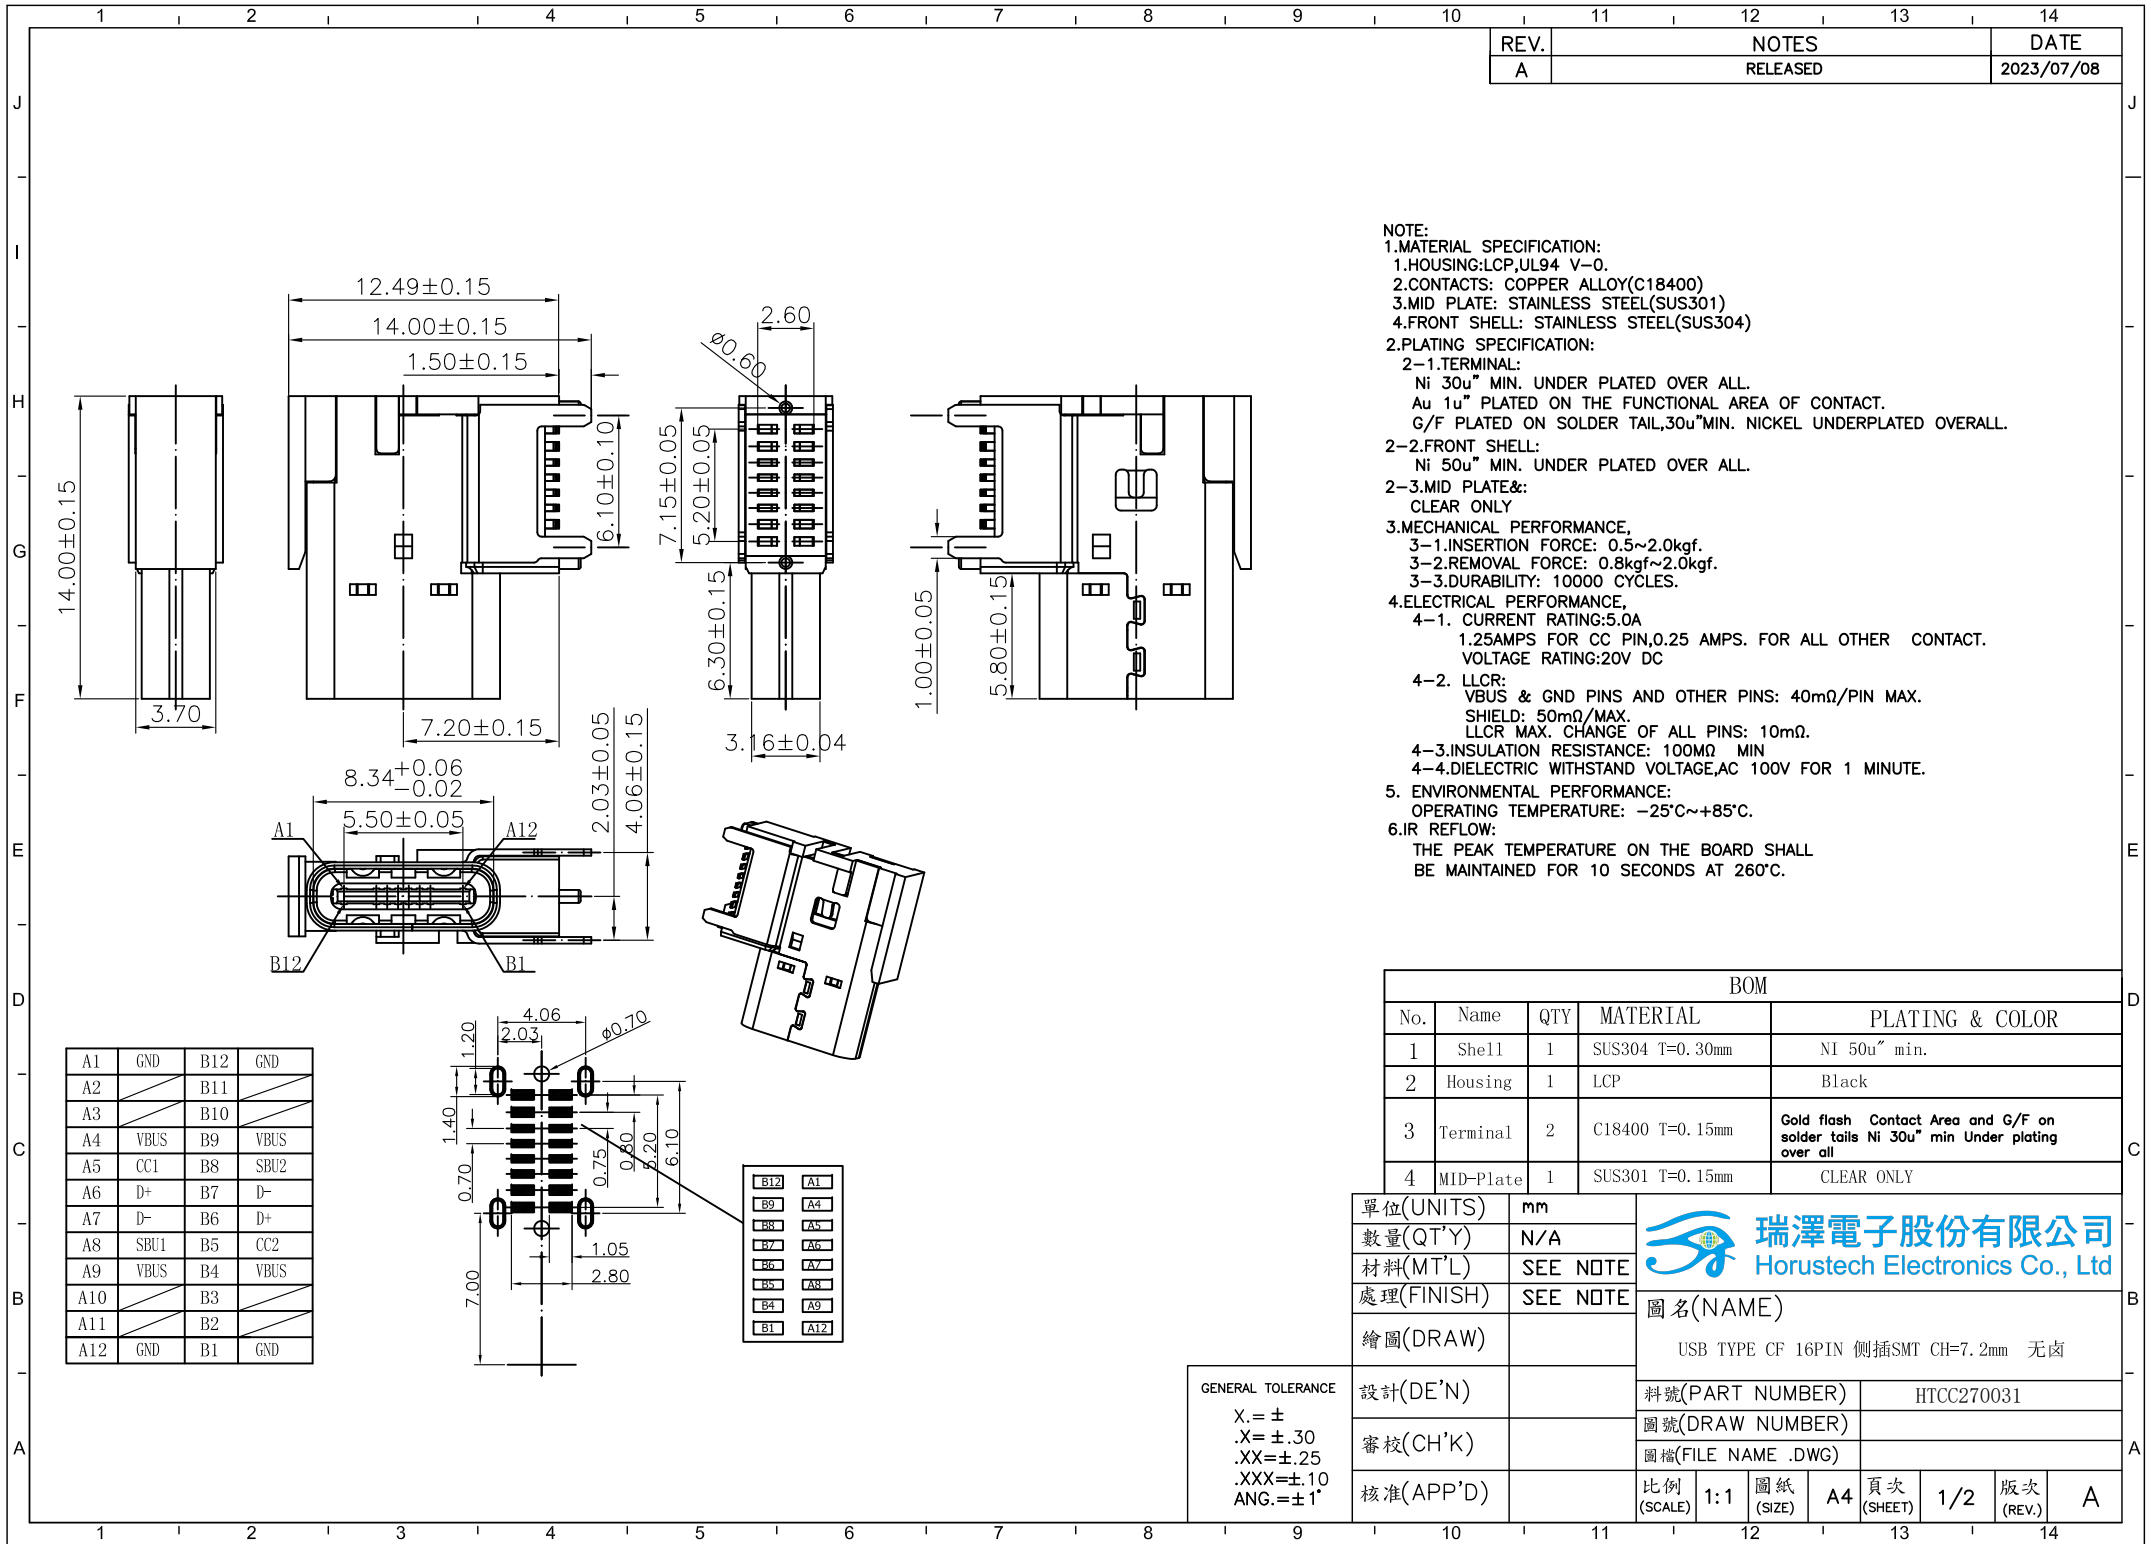


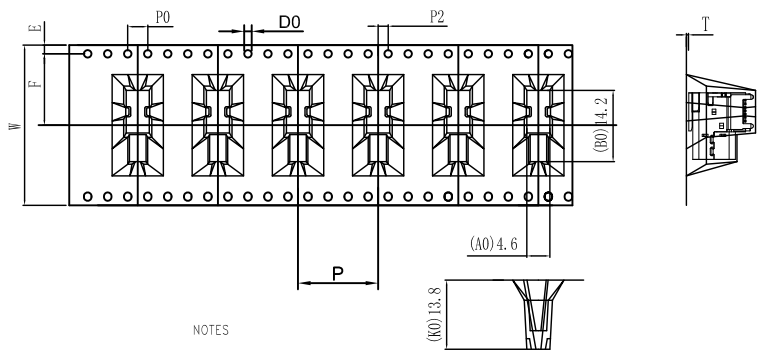


REV.	NOTES	DATE
A	RELEASED	2023/07/08


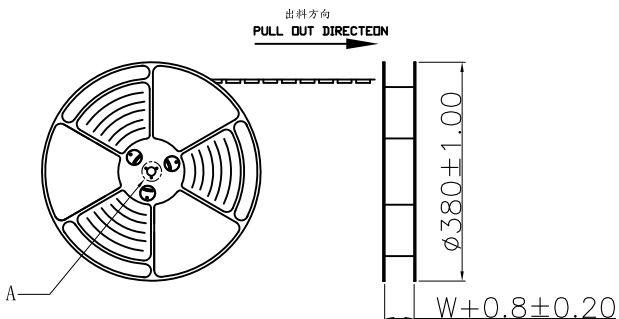


NOTES



1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTION



2. 上帶 剝力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)
出貨 運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT;
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



DETAIL: A
10:1

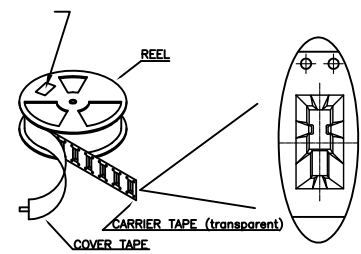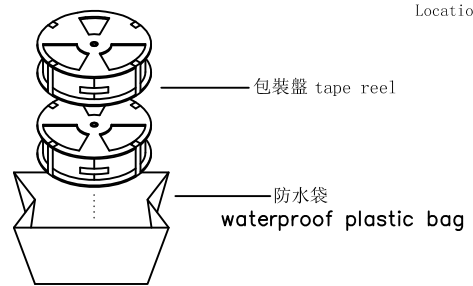

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)
Location of label sticking (label)

NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格。
Packing q'ty of each reel & carton as below table shown.
2. 將裝滿產品的卷盤放入紙箱并以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

卷帶	規格: $\phi 380\text{mm}$	包裝數量: 400PCS
紙箱	規格: $390\text{mm}\times 390\text{mm}\times 310\text{mm}$	包裝數量: 8盤 / 3200PCS

W	32 ± 0.3
F	14.2 ± 0.1
S0	± 0.1
T	0.50 ± 0.1
E	1.75 ± 0.1
P	16.0 ± 0.1
P0	4 ± 0.1
P2	2 ± 0.15
A0	4.60 ± 0.1
B0	14.2 ± 0.1
K0	13.8 ± 0.1
DO	1.50 ± 0.1

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE
繪圖(DRAW)	
設計(DE'N)	
審校(CH'K)	
核准(APP'D)	
圖名(NAME)	USB TYPE CF 16PIN 側插SMT CH=7.2mm 無齒
料號(PART NUMBER)	HTCC270031
圖號(DRAW NUMBER)	
圖檔(FILE NAME .DWG)	
比例(SCALE)	1:1
圖紙(SIZE)	A4
頁次(SHEET)	1/2
版次(REV.)	A



GENERAL TOLERANCE
X.= ±
.X= ±.30
.XX= ±.25
.XXX= ±.10
ANG.= ±1°