

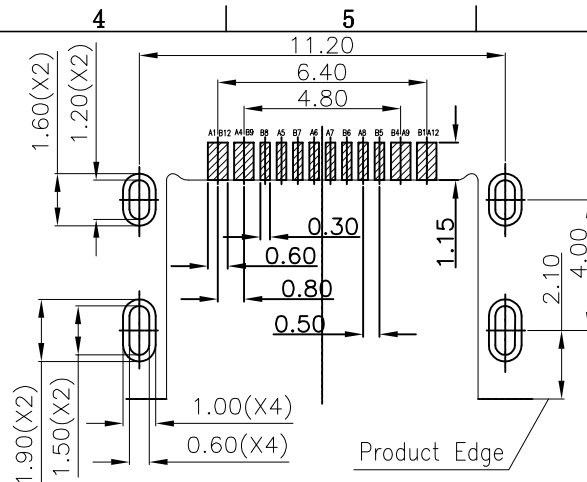
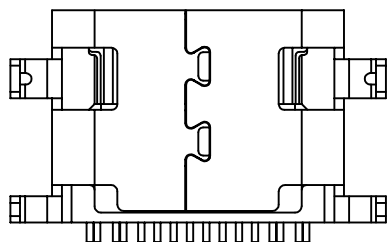
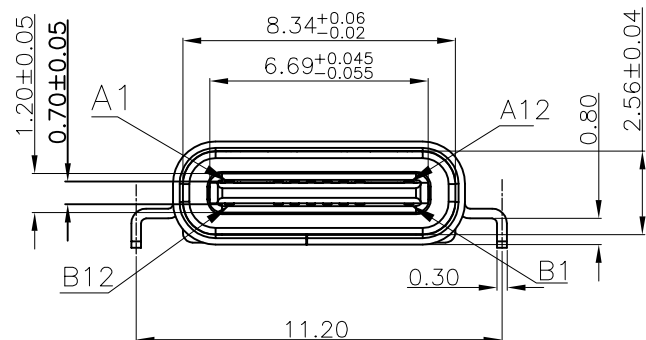


RoHs

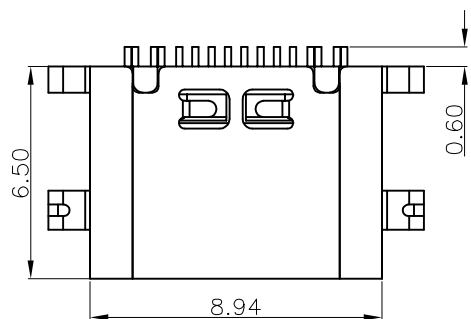

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

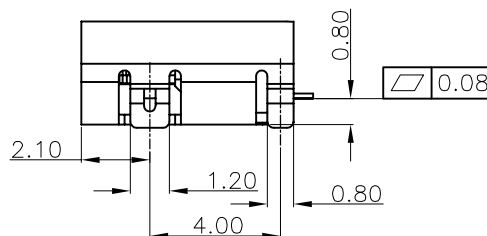

VER	MARK	PR. BY	ECR/ECN	DESCRIPTION	DATE
A	A	GYANG		NEW-DWG	07/18' 22

注解:

规格描述:

1. 额定电流: 5A MAX
2. 额定电压: 20V DC MAX
3. 介质承受电压: 100 VAC 1MINUTE
4. 工作温度: -30 °C ~ 85 °C
5. 接触阻抗: 40 MILLIONHM MAX
6. 绝缘阻抗: 100 MEGOHMS MIN.
7. 插入力: 5N~20N
8. 拔出力: 8N~20N
9. 寿命耐久: 10000 次
10. 盐雾: 24H

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

料号	规格
1016-FGB466	沉板0.8/黑色/电镀全金1u"

NO.	PART NAME	Q' TY	MATERIAL	FINISH	CUSTOMER		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY:	TITLE:	瑞澤電子股份有限公司 HorusTech Electronics Co., Ltd	
5	中钢片		SUS301-1/2H 0.15*23mm	/	SIZE	UNITS	X±0.50	X*±5.0°	Song	Type-C 16Pin 3次MD 沉板0.8		
4	外壳	1	SUS201-1/2H 0.3*30mm	80u"Ni Min.	A4	MM[INCH]	.X±0.35	.X*±3.0°	CHECKED BY:	PART NO.:		
3	上端子	1	C2680 0.15*18mm	Au 1u"/50-80u"Ni Min.	SCALE	REV.	.XX±0.25	.XX*±2.5°	GYANG	See the List		
2	下端子	1	C2680 0.15*17.8mm	Au 1u"/50-80u"Ni Min.	1:1	A	.XXX±0.15	.XXX*±2.0°	DESIGN BY:	DWG NO.:	SHEET	
1	塑胶	1	LCP or PA	UL 94 V-0					Deng	HTCC430002	1/1	