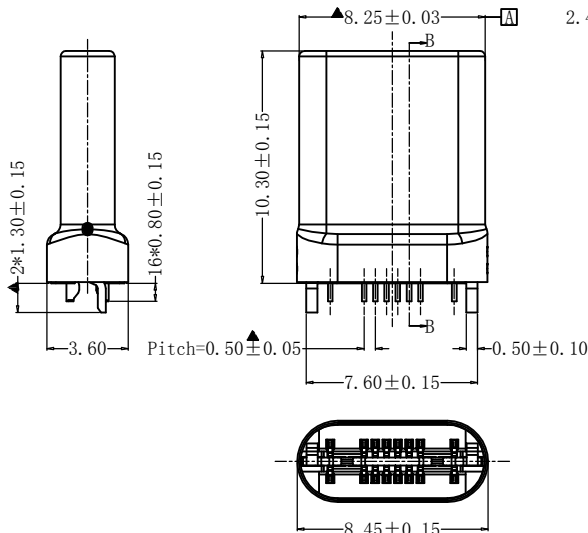
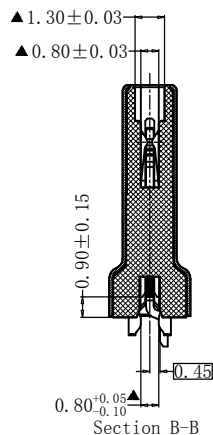




RoHS


激光焊接
拉力50N
Min.

SPECIFICATION:

- Material & Finish: See the list;
- Mechanical:
 - Mating force: 5-20Nf;
 - Unmating force: Initial: 8-20Nf; Final: 6-20Nf;
 - Durability: 10000 Cycles;
 - Shell withdrawal force: 50Nf Min. (Jointing);
- Electrical:
 - Current Rating: 3A or 5A Max. for VBus;
 - Voltage Rating: 20V Max.;
 - Dielectric Withstanding voltage: 100VAc;
 - Contact resistance: 40m Ohms Max.;
 - Insulation Resistance: 100M Ohms Min.;
- Environmental:
 - Operating temperature: -40° C ~ +85° C;
 - Salt Spray Test: 48H Min.;
 - Wetting Temperature: 265±5° C, 5±0.5s

序号	塑胶颜色	端子材料	外壳电镀	端子电镀G/F	端子电镀足lu"
1			亮镍		
2			喷砂镍		
3	黑色	C7025-Tm04	珍珠镍		
4			哑镍		HTCC430006-Plug
5			镀金		

NO.	PART NAME	Q' TY	MATERIAL	FINISH
4	Shell	1	SUS316L	50u"Ni Min.
3	Latch	1	SUS, T=0.35mm	50u"Ni/100u"Sn
3	Contact	8	C2680-SH, C7025-TM04	Au/50u"Ni Min.
1	Housing	1	LCP	UL 94 V-0

				APPROVED BY: FRANK	TITLE: Type-C Plug 16Pin T3.6 L10.4插Pin式(拉伸无弹片)		
SIZE A4	UNITS MM[INCH]	X±0.50 .X±0.35	X*±5.0° .X*±3.0°	CHECKED BY: JASON			
SCALE 1:1	REV. B	.XX±0.25 .XXX±0.15	.XX*±2.5° .XXX*±2.0°	DESIGN BY: SAM	DWG NO.: HTCC430006-Plug	SHEET 1/1	

VER	MARK	PR. BY	ECR/ECN DESCRIPTION	DATE
A		JASON	NEW RELEASE	08/27' 21
B		SAM	依实物修改焊点	05/19' 22