

X2-MRA Series

Rocker Switches



MATERIALS

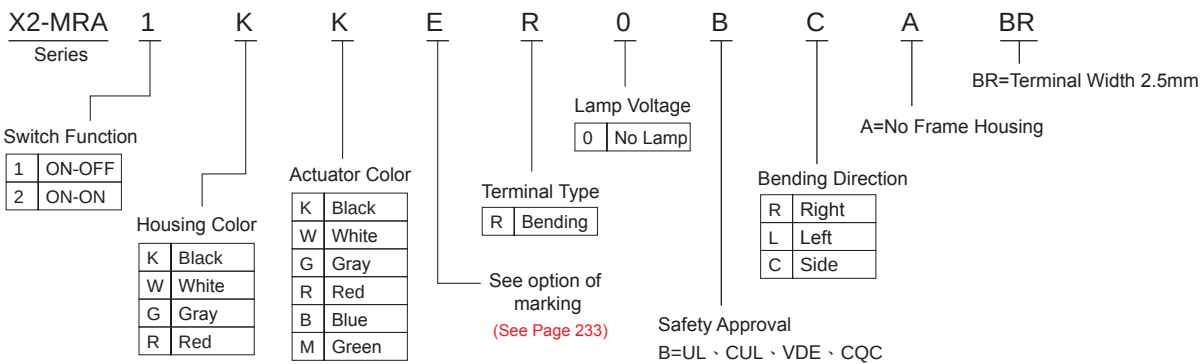
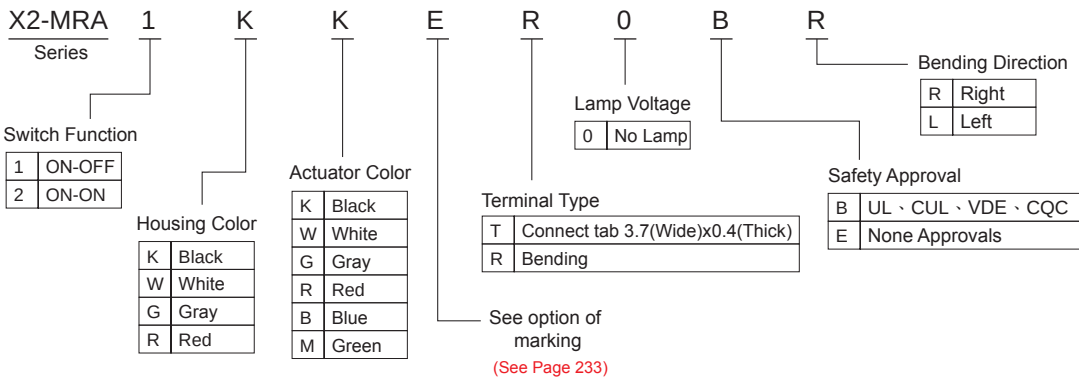
Housing: PA66
Rocker: PA66
Contacts: Silver alloy
Terminal: Brass silver plated
Spring: SWC
Movable arm: Brass silver plated

SPECIFICATIONS

Electrical rating : 3A 250VAC & 3A 125VAC
Contact resistance: < 20mΩ(initial)
Insulation resistance: > 1000MΩ(500VDC between open contacts)
Dielectric strength: > 1500V 1 minute
Mechanical life: > 30000 cycles
Electrical life: > 10000 cycles
Temperature rise at the terminal: Max.30℃
Solder ability of terminal: Max350℃, 3S(no pressure may be placed in the terminals when soldering by hand)
Any Cd Pb Hg etc and it's compounds is not include in this product
Ambient temperature: 10T85/55
Ambient humidity: Max.85%
Degree of protection: IP20
Applicability for appliance of class: class II
Proof tracking resistance index(PTI): 175
Degree of pollution: normal




HOW TO ORDER




OPTIONS OF SWITCH FUNCTION

Item NO	POLES & THROWS	Rocker position		
		Left	Center	Right
X2-MRA1	SPST	ON	None	OFF
X2-MRA2	SPDT	ON	None	ON

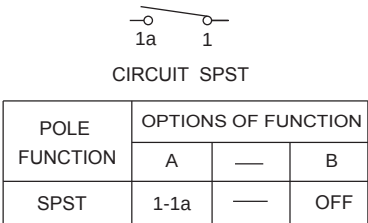


Part No. Shown :
MRA1KKETB




* We keep the right to alter the dimension without notice.

Part No. Shown :
MRA1KKFR0BL



* We keep the right to alter the dimension without notice.

























Part No. Shown :
MRA1KKFR0BCA-BR



* We keep the right to alter the dimension without notice.

CAP MARKING

FOR ROCKER SWITCHES

 A	 B	 C	 D	 E	 F	 G	 H	 I
 J	 K	 L	 M	 N	 O	 P	 Q	 S
 T	 U	 V	 W	 X	 Y	 Z	 1A	 1B
 1C	 1D	 1E	 1F	 1G	 1H	 1I	 1J	 1K
 1L	 1M	 1N	 1O	 1P	 1Q	 1R	 1S	 1T
 1U	 1V	 1W	 1Y	 1Z	 2A	 2B	 2C	 2D
 2E	 2F	 2G	 2H	 2I	 2J	 2K		