






REVISIONS (修正)			
NO. (序号)	DESCRIPTION(描述)	DCN NO.(变更号)	DATE(日期)
A.0	NEW RELEASE	ECN-2201608002	2016.08.01

NOTES:

1. Materials:
 - .Housing&Cap: High Temperature Polyester (UL94V-0), Black
 - .Plunger&Barrel: brass
 - .Spring: SUS
 - .Glue: Waterproof glue
2. Plating:
 - .Plunger: 10 micro-inch minimum Au over
50~120 micro-inch nickel.
 - .Barrel : 50 micro-inch minimum Au over
100~150 micro-inch nickel.
3. Electrical:
 - .Rated current & voltage: DC12V, 1A.
 - .Contact resistance: 50 mohm maximum
at working height(quiescence)
4. Mechanical:
 - .Normal force:80±20g at Normal working height
 - .Durability: 10,000 cycles(minimum)
5. When the current is greater than 1A then need
to increase the time delaycircuit(3 second)
6. To ensure the best usage,please operate it based
on the working height
.Based on the engineering drawings,shall not exceed
the maximum allowed compression
7. RoHS & HF complied product.

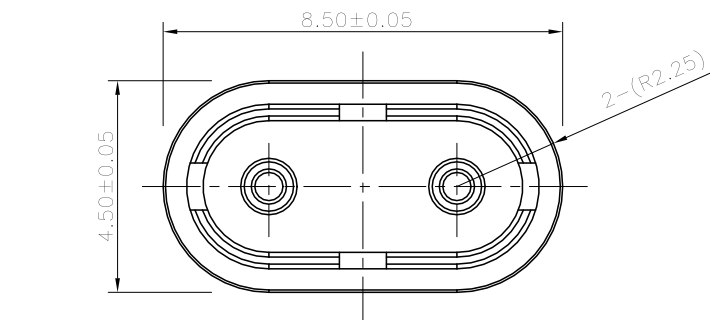

Please Approve this Drawing	
Date	
Signature	

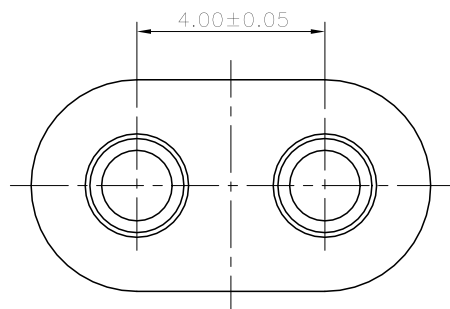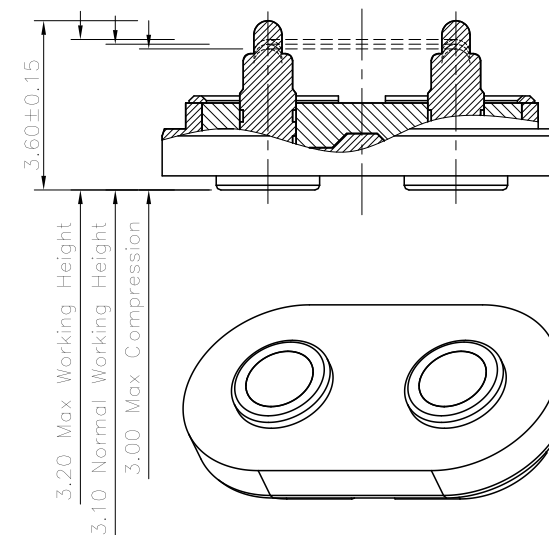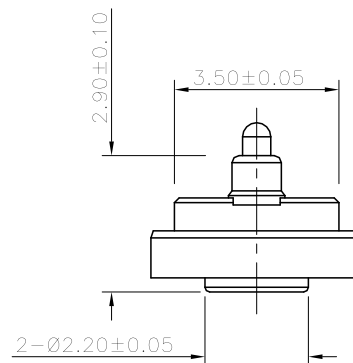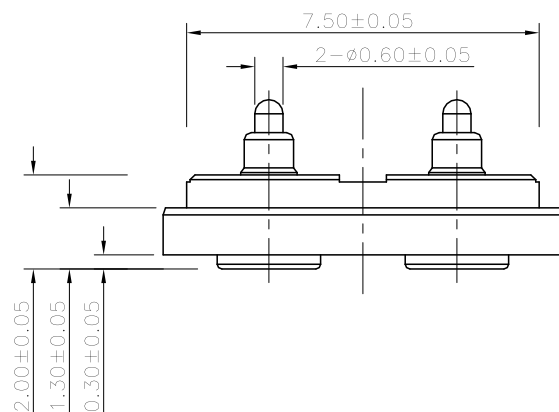

DRAW (设计)	John_Pan	SCALE (比例)	8 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	P5562MP01-02B400HE		
CHECK (校对)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	See Notes		
AUDIT (审核)		COUNTER SIGN (会签)				DATE (日期)	2016.08.01	REV	A.0
APPROVE (核准)		PLATE (镀层)				See Notes			TITLE (品名)
THE UNMARKED TOLERANCE ARE AS BELOW : (未标记的公差)				C.C.P. (DG) CONTACT PROBES CO.,LTD. 东莞中探探针有限公司 The information in this document is property of C.C.P company and should not be copied or reproduced in any other way, without written permission.					
LENGTH (尺寸)		ANGLE (角度)							
0~6.0	±0.05mm	0.	±2.0'						
>6~30	±0.10mm	0.0	±1.0'						
>30~120	±0.15mm	0.00	±0.50'						