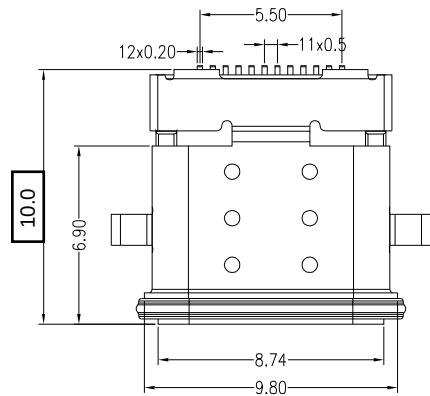


SPECIFICATION:

1.ELECTRICAL:

1-1:CURRENT RATING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;

1-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS

1-3:DIELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;

2:MECHANICAL CHARACTERISTICS:

2-1:MATING FORCE:5~20N

2-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)

2-3:FREQUENCY: 200±50 CYCLES /HOUR,10000 CYCLES

2-4:OPERATING TEMPERATURE ; -40°~80°.

3: WATERPROOF: IP-X7.








TABLE B

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TABLE A

7	RING	SILICON	---	1PCS
6	MID-PLANT	STAINLESS STEEL	---	1PCS
5	GND-PLANT	STAINLESS STEEL	NI/SN Plated	1PCS
4	SHELL	STAINLESS STEEL	---	1PCS
3	INNER SHELL	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	2SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	FINISH PLANTED	QTY

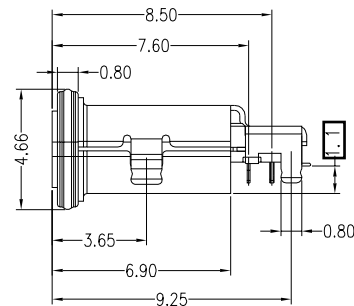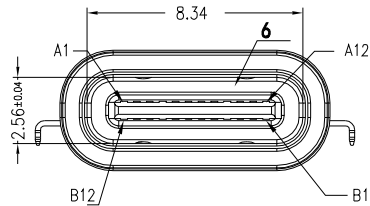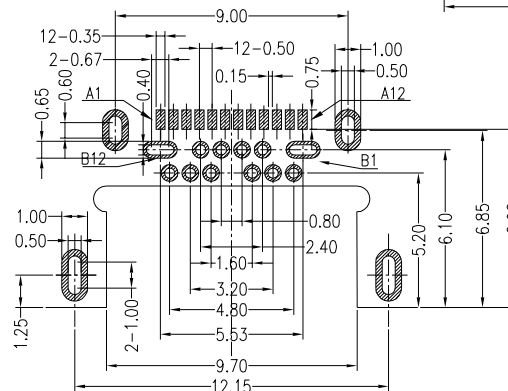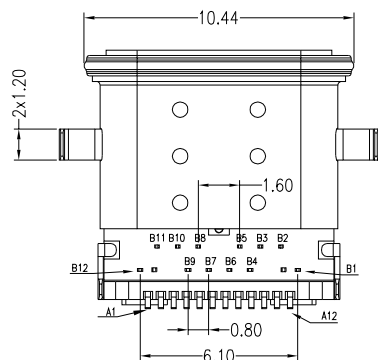

RECOMMEND PCB LAYOUT
TOL=±0.05

GENERAL TOLERANCE

.X ±0.25
.XX±0.20
.XXX±0.0

PROJECT



瑞澤電子股份有限公司
Horustech Electronics Co., Ltd



PART NO. HTCC470009

TITLE.
TYPE-C 24P 母座 沉板1.1 L=10.0四脚插防水

UNIT SCALE NUMBER REV
MM 1:1 A-00 A

DATE OLD REV NEW REV ECN DESCRIPTION CHECK APPROVAL

APPROVAL CHECK DRAWN DATA
Kim Huang Jova Lau Allen 2020/01/20

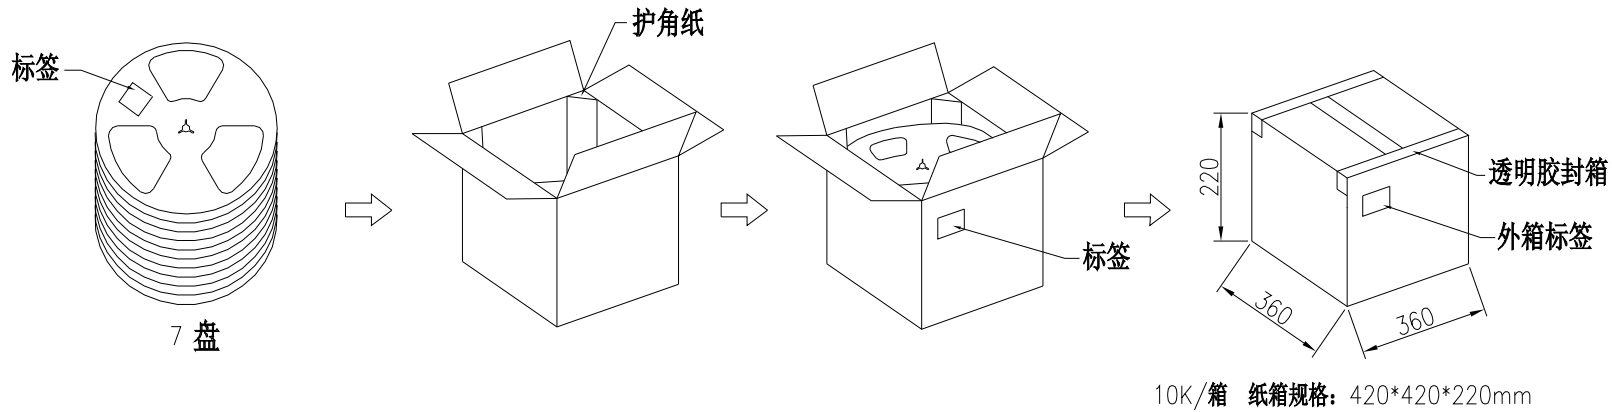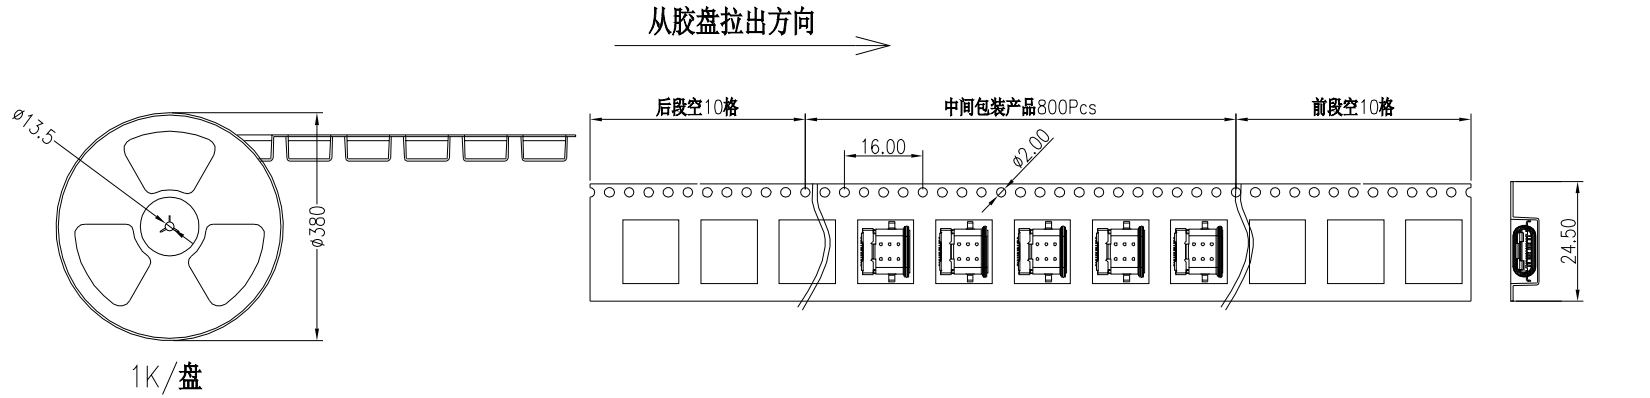

备注:
1.每盘前面空10个空格后面空10个空格,中间包装800PCS,
2.每箱包装7盘,共包装5600PCS

							GENERAL TOLERANCE .X ±0.25 .XX±0.20 .XXX±0.0	 瑞澤電子股份有限公司 Horustech Electronics Co., Ltd				PART NO. HTCC470009				
												TITLE. TYPE-C 24P 母座 沉板1.1 L=10.0四脚插防水				
								APPROVAL	CHECK	DRAWN	DATA	UNIT MM	SCALE 1 : 1	NUMBER A-00	REV A	
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Kim Huang	Jova Lau	Allen	2020/01/20					
1		2			3		4		5		6		7		8	