




7MS7AP2 M1QES (FRAME)

 Cap color


 Frame color

▼ SWITCH FUNCTION

NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS / SCHEMATIC	
			POS.1	POS.2	POS.1	POS.2
						
SP	Q2717	7MS7	ON	(ON)	1-3 	1-2 
DP	Q2727	7MD7	ON	(ON)	1-3,4-6 	1-2,4-5 


()= MOMENTARY

▼ POLE OPTIONS

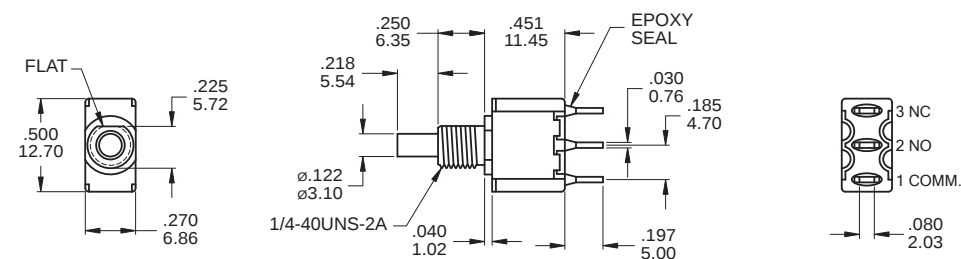

SPDT


Model name. 7MS7P1B11M1QES

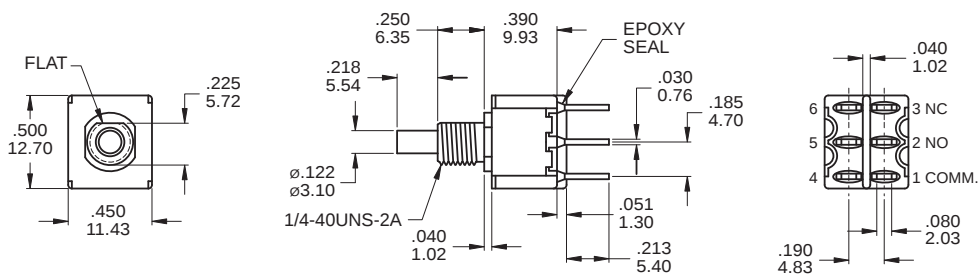

DPDT

Model name. 7MD7P1B11M1QES

M2

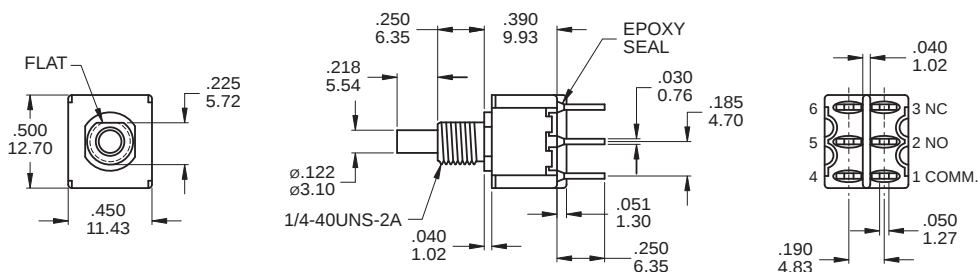


DPDT

Model name. 7MD7P1B11M2RES


▼ PLUNGER OPTIONS

P1 (Std.)




Note:
For terminal M6, M6N, M7, VS2-5:
-.017inch(0.42mm)

PA Metal plunger




Standard for B60 bushing
Note: For terminal M6, M7, VS2-5:
SPDT: -.013inch(0.34mm)
DPDT: -.020inch(0.50mm)

PB Metal plunger



Standard for B13 bushing




PC Metal plunger



Standard for B60 bushing
Note:
1.PC plunger only for K1 Cap
2.For terminal M6, M7, VS2-5:
-.020inch(0.50mm)




▼ FRAME OPTIONS

AP2

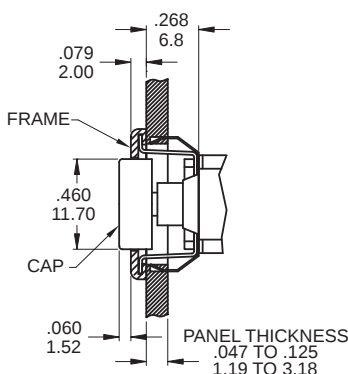

PANEL LAYOUT
INCREASE TO .620/.625 15.75/15.88
FOR .091/.125 2.31/3.18 THK PANEL



AP4 CAP(FLAT)

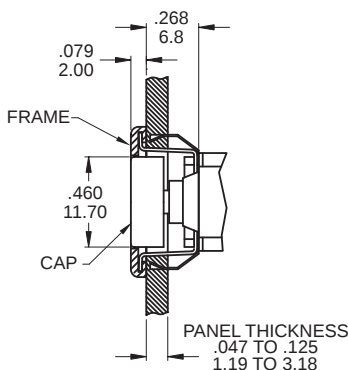



PANEL LAYOUT
INCREASE TO .620/.625 15.75/15.88
FOR .091/.125 2.31/3.18 THK PANEL

▼ BUSHING OPTIONS



B10 THD STD B20 NON-THD



B11 THD STD B21 NON-THD

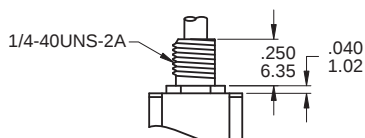

B60 THD

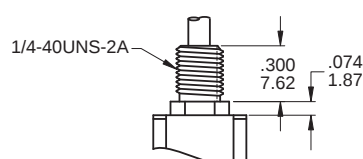

Note: Standard Hardware see page 105.

Only available for plunger PA, PC
Note: Not applicable to terminal M6N.



7M Series

Snap-Acting Pushbutton Switches




7M


Pushbutton Switches

▼ PANEL MOUNTING


1/4 IN BUSHING



Without locking ring (Keyway)




Without locking ring (Flat)




With standard locking ring.

15/32 IN BUSHING




Without locking ring (Keyway)



With standard locking ring.


▼ TERMINAL OPTIONS

M1 Solder lug




.030inch(0.76mm) THK.

M2 PC Thru-hole




.030inch(0.76mm) THK.

M3 Quick connect



.030inch(0.76mm) THK.

M5 Wire Wrap



.030inch(0.76mm) THK.

▼ OTHER TERMINAL OPTIONS

M6 Right angle P.C. Mount

M7 Right angle P.C. Mount

VS2 Vertical bracket P.C. Mount

VS3 Vertical bracket P.C. Mount

VS4 Vertical bracket P.C. Mount

VS5 Vertical bracket P.C. Mount

M6N Right angle P.C. Mount

Snap-in bracket


V2N Vertical bracket P.C. Mount

Snap-in bracket


OPTION CODE	DIM. 'A'
M51	.750 (19.50)
M52	.964 (24.48)
M53	.426 (10.80)
M54	.650 (16.50)

M6

(M6N - Snap-in)

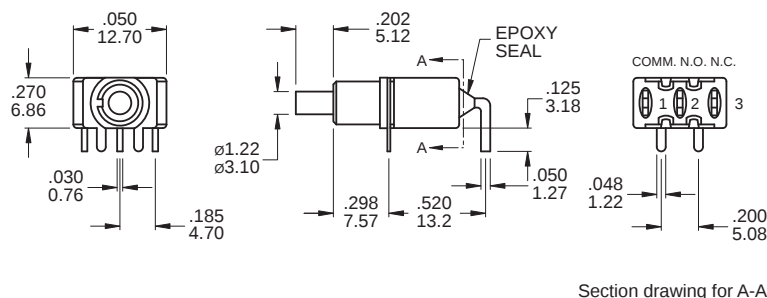


PCB MOUNTING




SPDT

Model name. 7MS7P1B20M6QES

M6

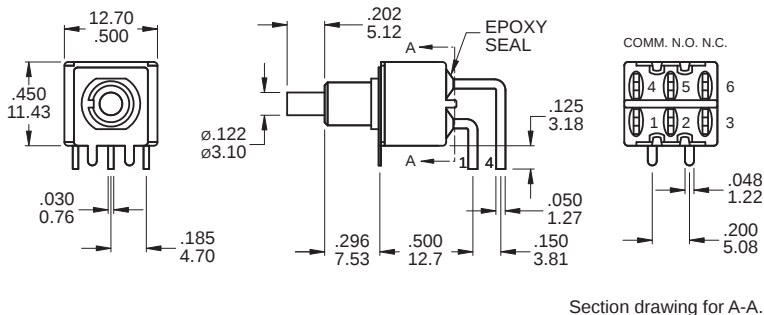


PCB MOUNTING




DPDT

Model name. 7MD7P1B20M6QES

M7

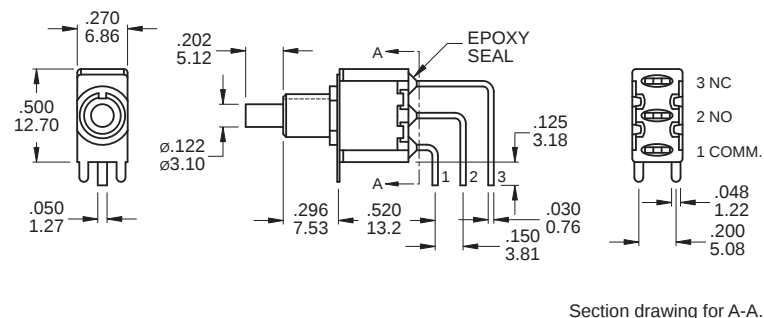


PCB MOUNTING




SPDT

Model name. 7MS7P1B20M7QES

M7

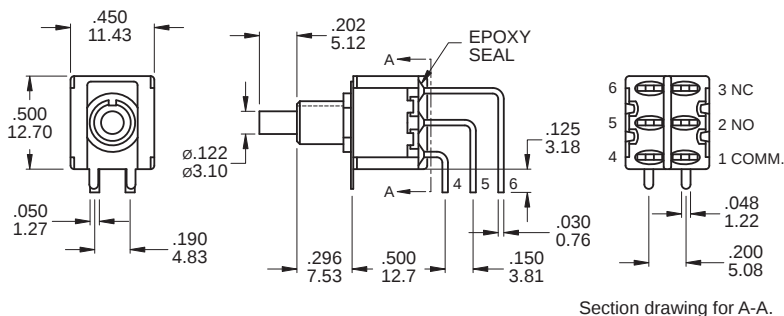


PCB MOUNTING



DPDT


Model name. 7MD7P1B20M7RES

VS2 / VS3
(V2N - Snap-in)

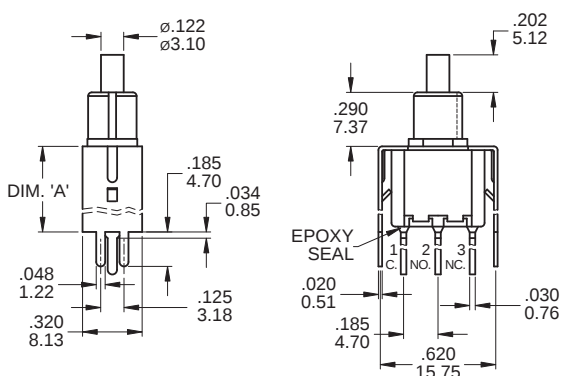

OPTION CODE	DIM. 'A'
VS2 (V2N)	.460 11.68
VS3	.630 16.00

PCB MOUNTING



SPDT

Model name. 7MS7P1B20VS2RES




7M Series

Snap-Acting Pushbutton Switches




7M
Pushbutton Switches

VS2 / VS3 (V2N - Snap-in)

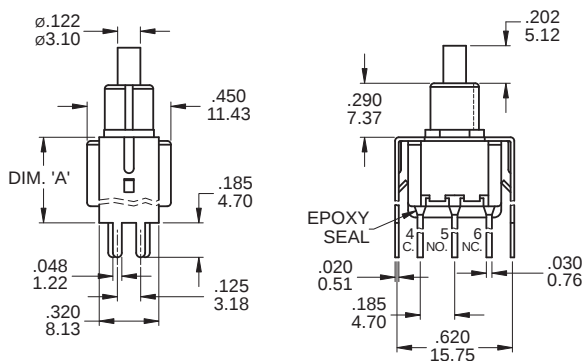

OPTION CODE	DIM. 'A'
VS2 (V2N)	.460 11.68
VS3	.630 16.00


PCB MOUNTING



DPDT


Model name. 7MD7P1B20VS2QES

VS4 / VS5

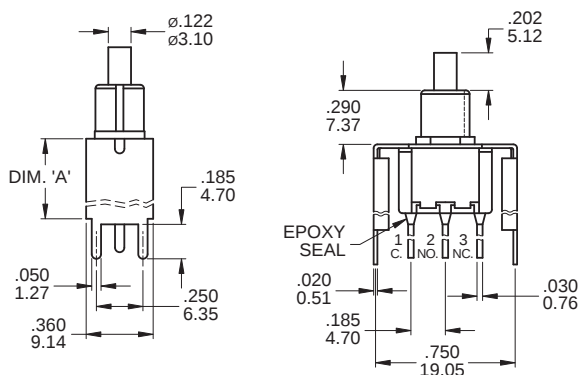

OPTION CODE	DIM. 'A'
VS4	.460 11.68
VS5	.630 16.00


PCB MOUNTING



SPDT


Model name. 7MS7P1B20VS4QES

VS4 / VS5

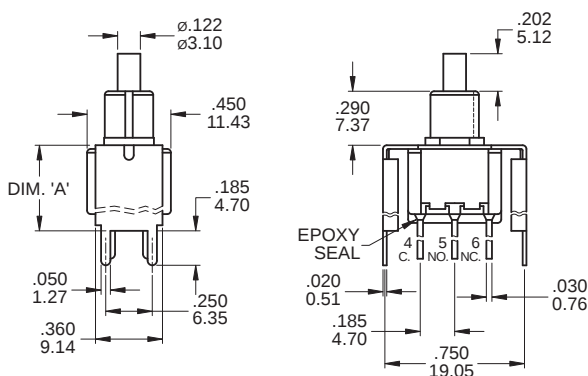

OPTION CODE	DIM. 'A'
VS4	.460 11.68
VS5	.630 16.00

PCB MOUNTING




DPDT


Model name. 7MD7P1B20VS4QES

▼ SNAP-IN TERMINAL OPTIONS


M6N



V2N



Note: The M6N terminal can only be used with SPDT, this option is not available for bushing B60.

**SPECIFICATIONS****CONTACT RATING:** Dependent upon contact material, see page 106.**MECHANICAL LIFE:** 50,000 make-and-break cycles.**CONTACT RESISTANCE:** 20mΩ max. (initial value) @ 2-4VDC
100mA for both silver and gold plated contacts.**INSULATION RESISTANCE:** 1,000MΩ min./1000VDC**DIELECTRIC STRENGTH:** 1,000 Vrms min.@sea level. (initial value)**OPERATING TEMPERATURE:** -40°C to 85°C.**MATERIALS****CASE:** Diallyl phthalate(DAP) (UL94V-0).**PLUNGER:** Glass filled nylon or glass filled polyester.(PBT)**BUSHING:** Brass, nickel plated.**HOUSING:** Stainless steel.**CONTACT:** Copper gold over silver for plating
(See page 106)**HOW TO ORDER**

MODEL NO.	PLUNGER	BUSHING	TERMINAL TYPE	TERMINAL PLATING	SEAL	RoHS SOLDERING
SP 7MSL On-On	P1 7.11 high(std) <u>Metal plunger</u> PA 5.54 high PB 7.00 high PC 8.75 high *	B60 7.62 high,keyway (thd std) B61 7.62 high,flat (thd std) B70 7.62 high,keyway (non-thd) B71 7.62 high,flat (non-thd) B13 11.38 high, keyway * (15/32 bushing)	M1 Solder Lug M2 PC thru-hole M51 19.50, Wire wrap M52 24.48, Wire wrap M53 10.80, Wire wrap M54 16.50, Wire wrap M6 Right angle, PC thru-hole M7 Vertical right angle, PC thru-hole <u>V-bracket</u> VS2 11.68 high V2N 11.68 high, snap-in VS3 16.00 high	Q Silver R Gold C Gold over silver	E EPOXY (std) N NO EPOXY	S RoHS & Lead Free

Note: Actuator cap options see page 105.

* PC plunger are only available with B13 bushing

EXAMPLE:

7MS7P1B60M1QES(STD)



7M(LOCK) Series

Snap-Acting Pushbutton Switches






7M(LOCK)
Pushbutton Switches

▼ SWITCH FUNCTION




NO. POLES	MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS / SCHEMATIC	
		POS.1	POS.2	POS.1	POS.2
SP	7MSL	ON	ON	1-2 	2-3
DP	7MDL	ON	ON	1-2,4-5 	2-3,5-6

▼ POLE OPTIONS

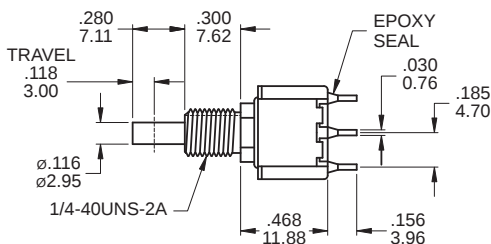

SPDT

Model name. 7MSLP1B60M1QES

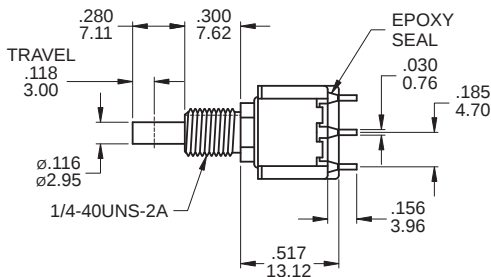


DPDT


Model name. 7MDLP1B60M1QES

▼ PLUNGER OPTIONS

P1 (Std.)




PA Metal plunger




Standard for B60, B70 bushing.

PB Metal plunger



Standard for B13 bushing.



PC Metal plunger



Standard for B60, B70 bushing
Note: PC plunger only for K1 Cap


Note: P1, PA, PC plunger for terminal M6, M7, VS2~3: -.020inch(0.50mm)

▼ BUSHING OPTIONS

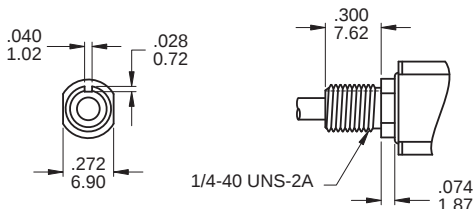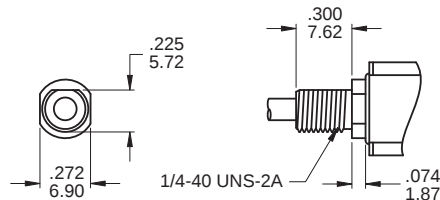
B60 THD STD**B70 NON-THD****B61 THD STD****B71 NON-THD**

Note: Panel mounting see page 98.


▼ TERMINAL OPTIONS

M1 Solder lug


.030inch(0.76mm) THK.

M2 PC Thru-hole

.030inch(0.76mm) THK.

M3 Quick connect

.030inch(0.76mm) THK.


M5 Wire Wrap

.030inch(0.76mm) THK.


▼ OTHER TERMINAL OPTIONS

M6 Right angle P.C. Mount**M7** Right angle P.C. Mount**VS2** Vertical bracket P.C. Mount**VS3** Vertical bracket P.C. Mount**V2N** Vertical bracket P.C. Mount, Snap-in bracket


OPTION CODE	DIM. 'A'
M51	.750 (19.50)
M52	.964 (24.48)
M53	.426 (10.80)
M54	.650 (16.50)

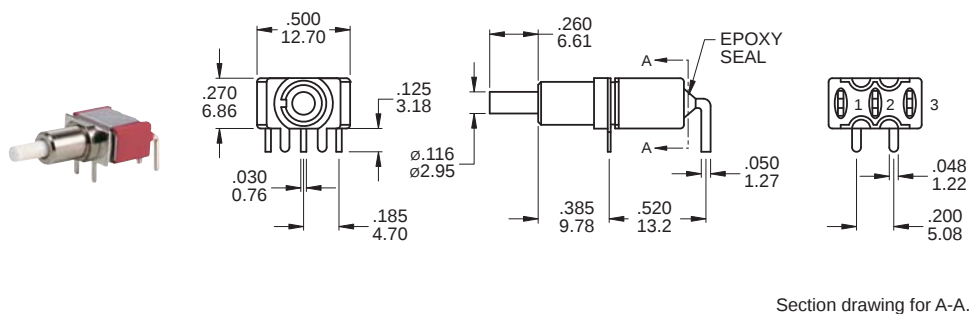M6


Section drawing for A-A.

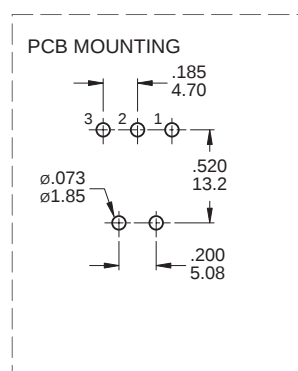**SPDT**

Model name. 7MSLP1B70M6QES

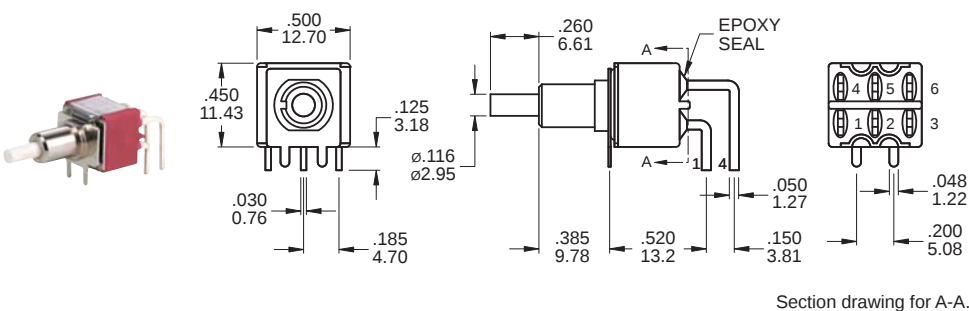M6

Section drawing for A-A.

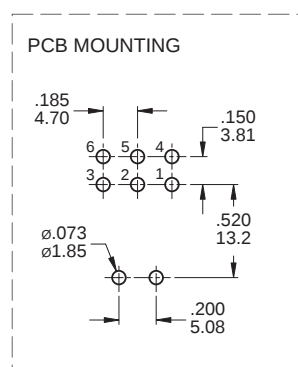**DPDT**

Model name. 7MDLP1B70M6QES




7M(LOCK) Series

Snap-Acting Pushbutton Switches




7M(LOCK)
Pushbutton Switches

M7

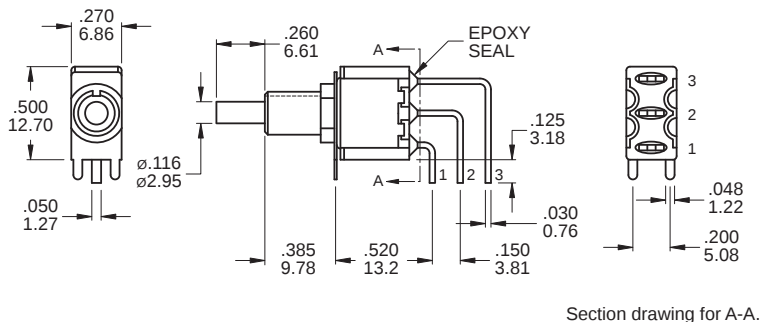


PCB MOUNTING




SPDT

Model name. 7MSLP1B70M7QES

M7

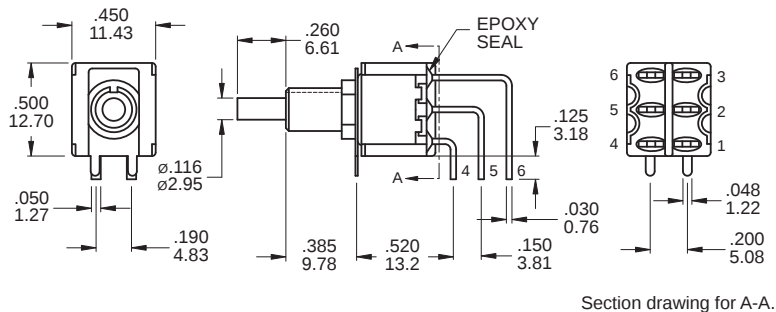


PCB MOUNTING




DPDT

Model name. 7MDLP1B70M7QES

VS2 / VS3
(V2N - Snap-in)

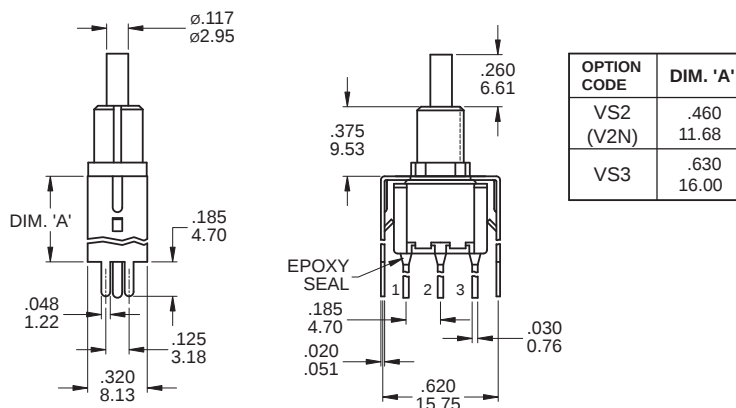


PCB MOUNTING




SPDT

Model name. 7MSLP1B70VS2QES

VS2 / VS3
(V2N - Snap-in)

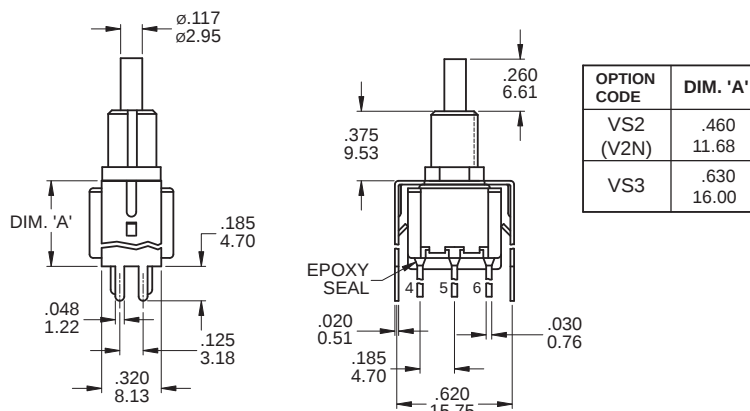

PCB MOUNTING




DPDT


Model name. 7MDLP1B70VS2QES

▼ PLUNGER CAP OPTIONS


C1




C2




C3




C4



C6



C7



CAP Color :

ITEM NO	COLOR
1	White (Std)
2	Black (Std)
3	Red (Std)
5	Yellow
6	Green (Std)
7	Blue
9	Gray


Note: Only available for 7M, 7A series

* Except standard color, for other colors information please consult sales representativity.

EXAMPLE:

Model name. Cap color
Cap type
0 No hardware
5 Standard hardware

K1



Only available for plunger PC

▼ HARDWARE


EXAMPLE: Model name. 5 Standard hardware

* Standard Hardware: 2 nut, 1 locking ring, 1 lockwasher

* For further information please consult sales representativity.


1/4 NUT (Std.)

Model name. MNU-1M01A




LOCKING RING (Std.)

Model name. MNU-1M02




LOCKING RING (Std.)

Model name. MNU-1M11




LOCKWASHER (Std.)

Model name. MNU-1M03




15/32 NUT (Std.)

Model name. MNU-1M07

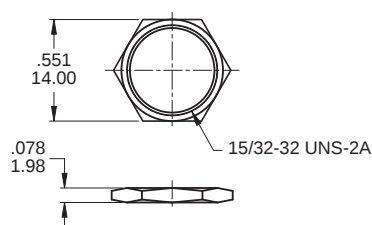


LOCKING RING (Std.)

Model name. MNU-1M08

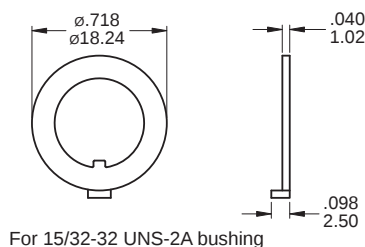


LOCKWASHER (Std.)

Model name. MNU-1M09




DRESS NUT

Model name. MNU-1M19 MOQ: 10K

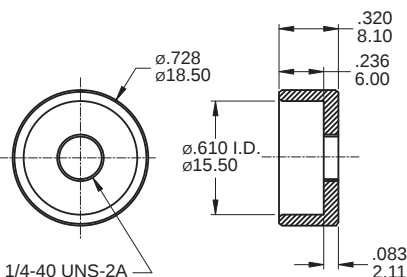


DRESS NUT

Model name. MNU-1M20 MOQ: 10K

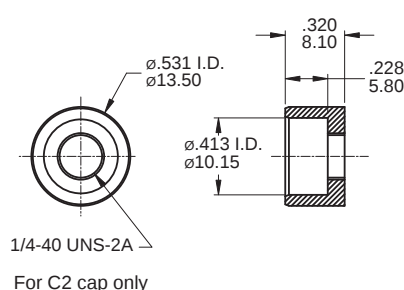

DRESS NUT

Model name. MNU-1M21 MOQ: 10K

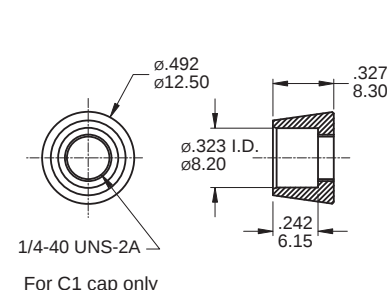



▼ CONTACT & TERMINAL PLATING OPTIONS

7M series

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Silver	Silver	3 Amps with resistant load @ 120VAC or 28VDC 1 Amps with resistant load @ 250VAC
C	Gold over Silver	Gold over silver	
R	Gold	Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

7M(LOCK) series

	CONTACT PLATING	TERMINAL PLATING	RATINGS
Q	Gold over Silver	Silver	3 Amps with resistant load @ 120VAC or 28VDC 1 Amps with resistant load @ 250VAC
C		Gold over silver	
R	Gold	Gold	0.4 Volt - Amps (VA) max. @ 20V max. (AC or DC)

▼ SOLDERING PROCESS

MANUAL SOLDERING: Use 30 watts soldering iron and controlled the temperature at 350°.

Duration of solder immersion: Max. 5 sec.

WAVE SOLDERING: Recommend soldering temperature: 260 ± 5°C

Duration of solder immersion: Max. 5 sec. (PCB thickness is 1.6mm)