
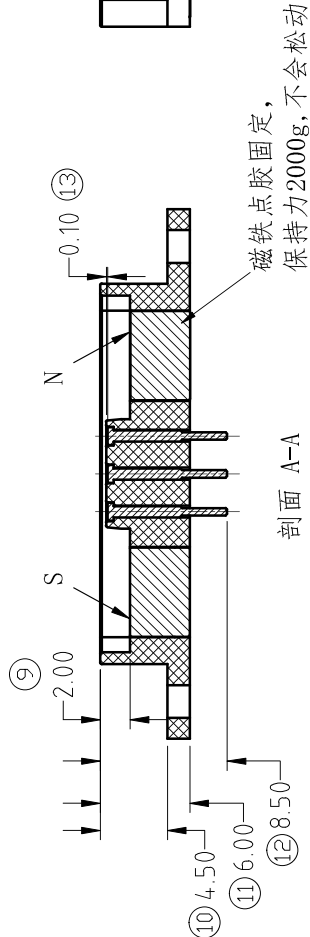


Electrical:<电气性能>
.Rated current & voltage: DC 12V, 3A Max.
<额定电压, 电流: DC 12V, 3A Max>
.When the current is more than 1A, then need to add a delay circuit(3 second)
.100% open & short test.
<100%导通,短路测试>
."★"Marked is Critical dimension, "Ⓢ" Marked is cpk dimension, they must be checked by QC.
<标示 "★"是重点尺寸, 标示"Ⓢ"是cpk尺寸, 它们必须被QC检查.
First Part Inspections are marked by ball marker "Ⓢ"
用球标示的是首件尺寸 "Ⓢ"
.The product must be checked for use by male and female
<产品必须做公母对接使用检验>
.The magnetic adsorption force of male and female is 500g Min.
<公母吸附力为500g最小>
.Once open the pack, please use it within one week or repackage it
<打开密封后, 请在一周内使用或重新包装>
.Comply with ROHS Product requirements.
<符合ROHS 产品要求>


Approve Signature

无 铅
Lead-free
<1000PPM

RoHS

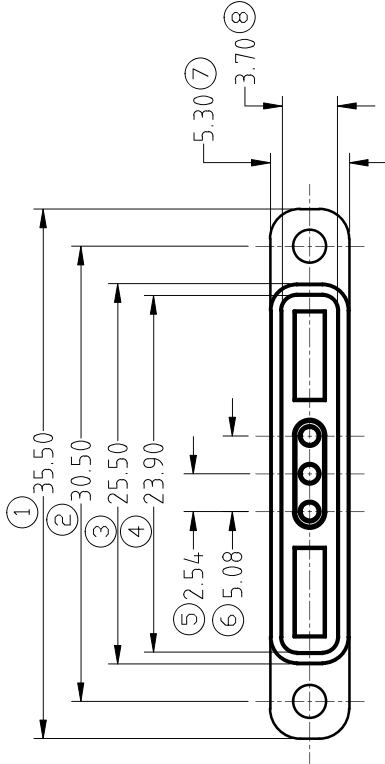


5	CFE PACK	MFB000202-03A1AF-PK	
4	Turning: Lead-free Brass C6801 0.125um Au、 车件: 无铅黄铜C6801 镀金0.125um	B709-W1005-F	3PCS
3	N52 NdFeB Magnet plating Ni-Cu-Ni、 <N52 钕铁硼磁铁 表面镀镍铜镍>	B647-M4104	IPC
2	N52 NdFeB Magnet plating Ni-Cu-Ni、 <N52 钕铁硼磁铁 表面镀镍铜镍>	B647-M3103	IPC
1	Black HTN UL94 V-0 <黑色 HTN UL94 V-0>	B709-H3003	IPC
序号 <NO. >	规格 <Specification>	料号 <P/N>	用量 <Usage>

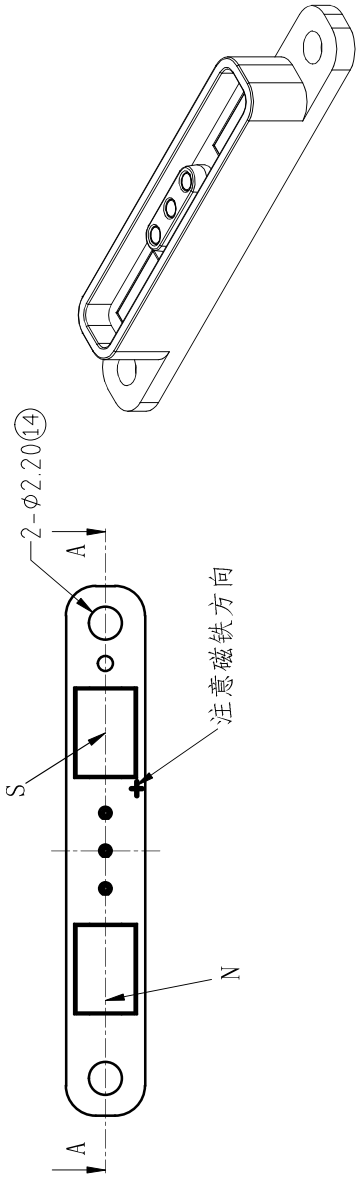

(A1)

THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO., LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		SHEET: 1 of 1	
SCALE	NA	UNIT: mm	
ANGLE	±2°	A4	
0~6	±0.10		
>6~30	±0.20	DRAW	
>30	±0.30	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	
PART NO.		MFB000202-03A1AF	
FILE NAME		BP709XX	
TITLE.		Lead Free Female Magnetic Connector 无铅母端磁吸连接器	



A1	2022.03.29	有铅改无铅 (相关料号相应更新)
A0	2016.11.04	New Release新发行
REV	DATE日期	DESCRIPTION描述

(A1)